

 **Maxxima**[®]

NEW PRODUCTS

SEPTEMBER 1, 2020

40 NEW PRODUCTS



**INTRODUCING OUR NEW PRODUCTS
SEE PAGES 2-11 FOR DETAILS**



**SHARE YOUR PHOTOS
ON FACEBOOK OR INSTAGRAM USING
#MAXXIMAINSTALLS**

GET SOME MAXXIMA SWAG IF YOUR PHOTO GETS FEATURED!

PANOR CORP/MAXXIMA

125 Cabot Court, Hauppauge, NY 11788 USA

Tel: 631.434.1200

1.866.MAXXIMA

Fax: 631.434.1457

info@maxxima.com

www.maxxima.com

 /maxxima

NTEA
THE ASSOCIATION FOR THE WORK TRUCK INDUSTRY



NEW MHLE-SERIES MAXXHEAT HEATED HEADLIGHTS

4" X 6" SERIES



MaxxHeat

SPECIFICATIONS

Voltage	12/24VDC		
Amp Draw (at 12.8V)	Heater Off:	Low Beam 0.7A	High Beam 0.9A
	Heater On:	Low Beam 1.7A	High Beam 2.0A
Dimensions	6.6" W x 4.2" H x 3.4" D		
Connector	Integrated Male H4 3-Pin or 2-Pin		
LEDs	5		
Legal Heading	Low DOT L SAE HL / High DOT U SAE HL		
DOT/SAE	J2650		

- Heating element is activated when the temperature drops below 45°F (7°C)
- "Heat On" Indicator lights up when heating element is on
- Polycarbonate Housing / Polycarbonate Lens
- *MaxxShield* Hard Coating with UV Protection
- Standard 3-pin or 2-pin H4 Connector
- Retrofits ANSI # H4651 (HI), H4656 (LO)
- DOT FMVSS108 and CMVSS108 Compliant
- 3 Year Warranty

MHLE-4X6LO-MH

4" x 6" Low Beam LED Headlight *MaxxHeat*

MHLE-4X6HI-MH

4" x 6" High Beam LED Headlight *MaxxHeat*

NEW HEATED LENS MELTS SNOW & ICE



NEW MHLE-SERIES MAXXHEAT HEATED HEADLIGHTS

5" X 7" SERIES WITH MAXXHEAT HEATED LENS TECHNOLOGY



MaxxHeat



MHLE-5X7HILO-MH

5" x 7" High/Low LED Headlight *MaxxHeat*

SPECIFICATIONS

Voltage	12/24VDC
Amp Draw (at 12.8V)	Heater Off: Low Beam 0.8A High Beam 1.6A Heater On: Low Beam 2.9A High Beam 3.7A
Dimensions	7.9" W x 5.6" H x 3.9" D
Connector	Integrated Male H4 3-Pin
LEDs	12
Legal Heading	DOT SAE HL
DOT/SAE	J2650

- Heating element is activated when the temperature drops below 45°F (7°C)
- "Heat On" Indicator lights up when heating element is on
- Polycarbonate Housing / Polycarbonate Lens
- *MaxxShield* Hard Coating with UV Protection
- Retrofits ANSI # 6052, 6053, H6054
- DOT FMVSS108 / CMVSS108 Compliant
- 3 Year Warranty

7" ROUND SERIES WITH MAXXHEAT HEATED LENS TECHNOLOGY



MaxxHeat



MHLE-07HILO-MH

7" Round High/Low LED Headlight *MaxxHeat*

SPECIFICATIONS

Voltage	12/24VDC
Amp Draw (at 12.8V)	Heater Off: Low Beam 0.8A High Beam 1.6A Heater On: Low Beam 2.9A High Beam 3.7A
Dimensions	7.0" Diameter x 3.75" Depth
Connector	Integrated Male H4 3-Pin
LEDs	12
Legal Heading	DOT SAE HL
DOT/SAE	J2650

- Heating element is activated when the temperature drops below 45°F (7°C)
- "Heat On" Indicator lights up when heating element is on
- Polycarbonate Housing / Polycarbonate Lens
- *MaxxShield* Hard Coating with UV Protection
- Retrofits ANSI# 6014, 6015, 6016, H6024
- DOT FMVSS108 / CMVSS108 Compliant
- 3 Year Warranty

NEW MAXXHEAT VIONIC HEADLIGHTS & MAXXHEAT STOP/TURN/TAILS

VIONIC "G2" 4" X 6" LED HEADLIGHTS WITH MAXXHEAT HEATED LENS TECHNOLOGY



SPECIFICATIONS

Voltage	12/24VDC
Amp Draw (at 12.8V)	Heater Off: Low Beam 1.2A DRL 1.2A High Beam 1.3A Heater On: Low Beam 3.2A DRL 3.2A High Beam 3.3A
Dimensions	4.2" W x 6.6" H x 3.7" D
Connector	1-1/2" Cable with Male H4 and Red Silicone Cover
Legal Heading	Low DOT L SAE HL / DRL DOT L DRL SAE HL DRL / High DOT U SAE HL

- Heating element turns on automatically when the temperature drops below 45°F (7°C)
- **Clear Heating Element** covers the entire lens—No visible wires
- Aluminum Housing / Polycarbonate Lens
- *MaxxShield* Hard Coating with UV Protection
- Patented LED Daytime Running Light (DRL) DOT Compliant DRL
- **US Patent # 10,076,992**
- Retrofits ANSI # H4651 (HI), H4656 (LO)
- DOT FMVSS108 / CMVSS108 Compliant
- 5 Year Warranty

VHL-4X6DRL2-MH	4" x 6" Low Beam / DRL <i>MaxxHeat</i>
VHL-4X6LO2-MH	4" x 6" Low Beam <i>MaxxHeat</i>
VHL-4X6HI2-MH	4" x 6" High Beam <i>MaxxHeat</i>



VHL-4X6DRL2-MH



VHL-4X6LO2-MH



VHL-4X6HI2-MH

4" & 6" MAXXHEAT HEATED STOP/TURN/TAILS



SPECIFICATIONS

LEDs	6
Voltage	12.8VDC
Amp Draw (at 12.8V)	Heater Off: Stop/Turn: 0.4A Tail: 0.1A Heater On: Stop/Turn: 2.3A Tail: 2.0A
Dimensions	4" Round: 4.3" Diam. x 1.8" Deep 6" Oval: 6.4" W x 2.2" H x 1.7" D
Mounting	4" or 6" Grommet
Connector	M42358R-MH / M63348R-MH: PL-3 M42358RDF-MH / M63348RDF-MH: Dry-Fit
Legal Heading	I6S2T2
DOT/SAE	J1395, J1398, J585e

- Heater turns on automatically when the temperature drops below 45°F (7°C)
- Just connect standard PL-3 or Dry Fit Connector—NO Additional Wiring
- Polycarbonate Lens
- Multi-stage smart heater—High, Medium, Low Power Mode
- DOT FMVSS108 and CMVSS108 Compliant
- 5 Year Warranty

M42358R-MH	4" Round STT with PL-3 <i>MaxxHeat</i>
M42358RDF-MH	4" Round STT with DryFit <i>MaxxHeat</i>
M63348R-MH	6" Oval STT with PL-3 <i>MaxxHeat</i>
M63348RDF-MH	6" Oval STT with DryFit <i>MaxxHeat</i>

NEW LED LICENSE LAMP STT/BU 3-STUD BOX LIGHT

M42223L THREE STUD LED BOX STYLE MULTI-FUNCTION LIGHT STT/BU WITH 5 PIN METRIPACK CONNECTOR & LED LICENSE PLATE LIGHT



SPECIFICATIONS

LEDs	42 (STT: 16, BU: 22, LICENSE: 4)
Voltage	12.8VDC
Amp Draw	60mA (License) 290mA (B/U) 150mA (Stop)
Dimensions	5.8" W x 6.8" H x 3.1" D (w/o studs)
Mounting	3-Stud
Connector	5 pin MetriPack 280, RH side
Legal Heading	A I6 L R S2 T2
DOT / SAE	J594, J593, J2040, J2261, J587

- 3-Stud OEM-Style Box Light
- LED Stop / Turn / Tail & LED Back-Up with LED License Light
- OEM 5-Pin MetriPack Connector
- Hi Impact Acrylic Lens / Polycarbonate Housing
- 5 Year Warranty

M42223L

3-Stud Box Style Multi-Function STT/BU/License RH Connector

M42222 THREE STUD LED BOX STYLE MULTI-FUNCTION LIGHT STT/BU WITH 5 PIN METRIPACK CONNECTOR



SPECIFICATIONS

LEDs	38 (STT: 16, BU: 22)
Voltage	12.8VDC
Amp Draw	290mA (B/U) 150mA (Stop)
Dimensions	5.8" W x 6.8" H x 3.1" D (w/o studs)
Mounting	3-Stud
Connector	5 pin MetriPack 280, RH side
Legal Heading	A I6 R S2 T2
DOT / SAE	J594, J593, J2040, J2261

- 3-Stud OEM-Style Box Light
- LED Stop / Turn / Tail & LED Back-Up
- OEM 5-Pin MetriPack Connector
- Hi Impact Acrylic Lens / Polycarbonate Housing
- 5 Year Warranty

M42222

3-Stud Box Style Multi-Function STT/BU RH Connector

3 NEW LED LICENSE LIGHTS

M25100L LED LICENSE LIGHT 2.7" X 1.6" BLACK HOUSING 2-STUD



SPECIFICATIONS

Voltage	12.8VDC	• DOT FMVSS Compliant
Amp Draw	70mA	• Black Housing 2-Stud Mount
Dimensions	2.7"W x 1.6"H x 2.8"D	• 1-Lamp or 2-Lamp Systems
Mounting	2 #10 Studs, 1-7/8" C to C	• Acrylic Lens and PVC Housing
Connector	2 Leads Blunt Cut, 4"	• 5 Year Warranty
LEDs	4	
Legal Heading	DOT SAE L	
DOT / SAE	J587	

M25100L

LED License Light 2.7" x 1.6" Black Housing 2-Stud

M25100L-X

LED License Light 2.7" x 1.6" Black Housing 2-Stud - Bulk Pack

M25200L LED LICENSE LIGHT 1.7" X 1" WITH STAINLESS STEEL CHROME BEZEL



SPECIFICATIONS

Voltage	12.8VDC	• DOT FMVSS Compliant
Amp Draw	90mA	• Stainless Steel Chrome Cover
Dimensions		• 1-Lamp or 2-Lamp Systems
• light only	1.7"W x 0.75"H x 0.96"D	• Acrylic Lens and Aluminum Housing
• with Bezel	2.5"W x 1.2"H x 0.9"D	• 5 Year Warranty
Mounting	2 Hole Surface, 2" C to C	
Connector	2 Leads Blunt Cut, 12"	
LEDs	4	
Legal Heading	DOT SAE L	
DOT / SAE	J587	

M25200L

LED License Light 1.7" x 1" With Stainless Steel Chrome Bezel

M25200L-X

LED License Light 1.7" x 1" Stainless Steel Chrome Bezel - Bulk Pack

M25201L LED LICENSE LIGHT 1.5" ROUND WITH STAINLESS STEEL CHROME BEZEL



SPECIFICATIONS

Voltage	12.8VDC	• DOT FMVSS Compliant
Amp Draw	40mA	• Stainless Steel Chrome Cover
Dimensions	1.5" Diam. x 1.7" Deep	• 2-Lamp Systems
Mounting	1.25" Hole	• Polycarbonate Lens and Aluminum Housing
Connector	2 Leads Blunt Cut, 7"	• 5 Year Warranty
LEDs	4	
Legal Heading	DOT SAE (2) L	
DOT / SAE	J587	

M25201L

LED License Light 1.5" Round With Stainless Steel Chrome Bezel

M25201L-X

LED License Light 1.5" Round Stainless Steel Chrome Bezel - Bulk Pack

NEW DAYTIME RUNNING LIGHT & OVAL WORK LIGHT

PLB-630-A COMPACT LED DAYTIME RUNNING LIGHT (DRL)



SPECIFICATIONS

Lumens	500
Voltage	12.8VDC
Amp Draw	0.6A
Dimensions	4.4" W x 1.4" H x 1.2" D
Mounting	Adjustable Stainless Steel Bracket
Connector	2 Leads Blunt Cut, 7"
Legal Heading	DOT SAE DRL
DOT / SAE	J2087

- DOT FMVSS-108 Compliant DRL
- 500 Lumens
- Can be used as a Projector Light or Work Light
- Black Cast Aluminum Housing, Polycarbonate Lens, Stainless Steel Mounting Bracket
- 5 Year Warranty

PLB-630-A

Compact LED Daytime Running Light (DRL)

MWL-63 6" OVAL LED WORK LIGHT 550 LUMENS DRY FIT



SPECIFICATIONS

Lumens	550
Voltage	12.8VDC
Amp Draw	0.5A
Dimensions	6.45 L x 2.26" W x 0.83" D
Connector	Dry Fit
Mounting	6" Oval Grommet
LEDs	12

- 6" Oval Grommet Mount Work Light
- 550 Lumens
- Dry Fit Connector
- Thin Profile
- Polycarbonate Lens
- 5 Year Warranty

MWL-63

6" Oval LED Work Light 550 Lumens Dry Fit

MWL-63-X

6" Oval LED Work Light 550 Lumens Dry Fit - Bulk Pack

NEW LED WORK LIGHT & LED CAB MARKER

MWL-46 ROUND 1,300 LUMEN WORK LIGHT



SPECIFICATIONS

Lumens	1,300
Voltage	12-36 VDC
Amp Draw	1.2A 12V / 0.7A 24V
Dimensions	4.8" Diam. X 1.9" Deep
Connector	Deutsch-style connector DT-04 with 6" leads included

LEDs 14

- 1,300 Lumen LED Work Light
- 12-36 VDC Multi-Voltage
- Polycarbonate Lens
- Non-Metallic Non-Corrosive Reinforced Nylon Housing
- Stainless Steel Bracket and hardware included
- Deutsch Connector Included
- 5 Year Warranty

MWL-46

Round 14 LED Black Work Light 1,300 Lumen

M17200-SERIES FREIGHTLINER* CAB MARKER & CLEARANCE / MARKER



SPECIFICATIONS

LEDs	26
Voltage	12.8VDC
Amp Draw	250mA (Amber) 100mA (Red)
Dimensions	5.75" L x 1.8" W x 1.1" D
Connector	2 Leads Blunt Cut, 4"
Mounting	2 hole surface, 4.9" center to center
Legal Heading	P2 P3 PC2
DOT / SAE	J592, J2042

- Freightliner* Cab Marker
- Available in Amber, Red, Amber Clear Lens, and Red Clear Lens
- Vertical or Horizontal Mount
- Polycarbonate Lens & Housing
- 5 Year Warranty



M17200R

5 3/4" x 1 3/4" Oval Clearance Marker P2/P3/PC Red

M17200RCL

5 3/4" x 1 3/4" Oval Clearance Marker P2/P3/PC Red Clear Lens

M17200Y

5 3/4" x 1 3/4" Oval Clearance Marker P2/P3/PC Amber

M17200YCL

5 3/4" x 1 3/4" Oval Clearance Marker P2/P3/PC Amber Clear Lens

* Freightliner is a registered trademark of Daimler Trucks N.A

NEW C/M, SIDE MID-TURN, AND LOWER PRICE

M17100Y-DV 1 5/8" X 4.5" CM AMBER REFLECTOR



SPECIFICATIONS

LEDs	3	• Clearance Marker & Reflector
Voltage	12/24VDC	• DOT/SAE Class A Reflector
Amp Draw	50mA	• High Impact Acrylic Reflex Reflector Lens
Dimensions	4.68" L x 1.65" W x 0.39" D	• P2/P3 LED Clearance/Marker
Connector	2 Leads Blunt Cut, 7"	• 12/24VDC Dual Voltage
Mounting	2 Hole Surface, 4" C to C	• 5 Year Warranty
Legal Heading	A P2 P3	
DOT / SAE	J592, J594, J2042	


M17100Y-DV

1 5/8" X 4.5" CM AMBER REFLECTOR

M17100YDV-X

1 5/8" X 4.5" CM AMBER REFLECTOR

M63121YDF 6" OVAL AMBER SIZE TURN WITH REFLECTOR, DRY FIT CONNECTOR

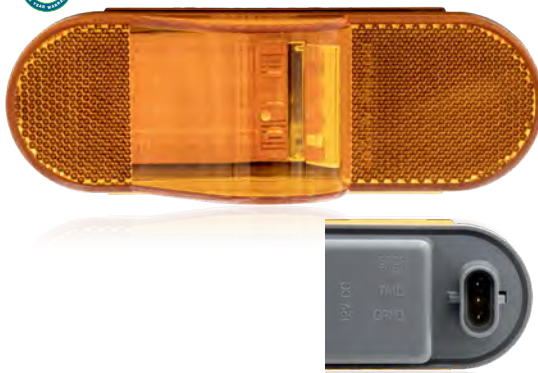

SPECIFICATIONS

LEDs	28	• Side Mid Turn / Side Marker
Voltage	12.8VDC	• Reflectorized
Amp Draw	540mA / 25mA	• Dry Fit Weather Pack Connector
Dimensions	6.5" L x 2.2" W x 2.8" D	• Acrylic Lens / Polycarbonate Housing
Connector	Dry Fit	• 5 Year Warranty
Mounting	6" Grommet	
Legal Heading	A E P2	
DOT / SAE	J2039, J592e	

M63121YDF

Oval Amber Side Turn / Side Marker DRY FIT Connector

M30332R/M30332Y NEW LOWER PRICE! — PETERBILT STYLE CLEARANCE MARKER



SPECIFICATIONS

LEDs	12	• Stainless Steel Bezel
Voltage	12.8VDC	• Hidden Mounting Screws
Amp Draw	160mA Red, 60mA Amber	• New Style replacement for M20332-Series
Dimensions	6.2" W x 1.8" H x 0.8" D	• Sealed Moisture Proof Electronics
Connector	2 Hole Surface, 3-15/16" C to C	• Solid State Circuit Board
Mounting	2 Leads, .180 Bullet & Ring	• Polycarbonate Lens & Housing
Legal Heading	P2P3	• 2 Mounting Screws Included
DOT / SAE	J592e, J2042	• 5 Year Warranty

M30332R

Oval Red Clearance Marker

M30332Y

Oval Amber Clearance Marker

M20485YWCL AMBER/WHITE MICRO WARNING BAR



2-Switch
Cigarette Plug
Adapter

SPECIFICATIONS

Voltage	12/24VDC	<ul style="list-style-type: none"> • Available in Split Color Amber/White or in Single Color All Amber • 10 Flash Patterns • Includes Magnetic Mount & Permanent Mount • Cigarette Plug with 2 Switches for On/Off and Pattern Select • 5 Year Warranty
Amp Draw	3.4A 12VDC / 1.7A 24VDC	
Dimensions	11.25" L x 7" W x 1.5" H	
Connector	15' Cable with Cigarette Plug	
Mounting	Magnetic Mount & Permanent Mount Kit Included	
Legal Heading	W3-1 SAE J845 Class 1	

M20485YWCL

Amber/White with Clear Lens

M20486YWCL AMBER/WHITE MINI WARNING BAR



2-Switch
Cigarette Plug
Adapter

SPECIFICATIONS

Voltage	12/24VDC	<ul style="list-style-type: none"> • Available in Split Color Amber/White or in Single Color All Amber • 10 Flash Patterns • Includes Magnetic Mount & Permanent Mount • Cigarette Plug with 2 Switches for On/Off and Pattern Select • 5 Year Warranty
Amp Draw	3.1A 12VDC / 1.5A 24VDC	
Dimensions	14" L x 8.25" W x 1.75" H	
Connector	15' Cable with Cigarette Plug	
Mounting	Magnetic Mount & Permanent Mount Kit Included	
Legal Heading	W3-1 SAE J845 Class 1	

M20486YWCL

Amber/White with Clear Lens

M20389-SERIES SINGLE COLOR AND SPLIT COLOR SURFACE MOUNT WARNING LIGHTS



SPECIFICATIONS

Voltage	12/24VDC	<ul style="list-style-type: none"> • 6 LED Low Profile Surface Mount Warning Light • Single Color All Amber • Split Color Amber/White • 27 Flash Patterns • Includes Black Bezel • 5 Year Warranty
Amp Draw	0.8 (12V) 0.4 (24V)	
Dimensions	5.8" L x 1.5" W x 0.5" D	
Connector	4 Leads Blunt Cut, 7"	
Mounting	2 Hole Surface	
Legal Heading	W1	
SAE	J595 Class 1 / CA 13	

M20389YCL
M20389YWCL

Profile 6 LED Amber Clear Lens Class 1 Warning
Low Profile 6 LED Amber / White Clear Lens Class 1 Warning

M84420YWCL-DC DUAL FUNCTION SCENE LIGHT / WARNING LIGHT



SPECIFICATIONS

Voltage	12.8VDC	<ul style="list-style-type: none"> • 700 Lumen White LED Scene Light/ Undercarriage Light • SAE Class 1 Amber LED Flashing Warning Light • 28 Flash Patterns • Aluminum Housing with Nylon End Caps • Exterior Mount IP68 Rated • Polycarbonate Lens • 3 Year Warranty
Amp Draw	0.9A	
Dimensions	13" L x 1.4" W x 1.4" D	
Mounting	2 Hole Surface	
Connector	4 Leads .180 Bullets, 17"	
LEDs	72 (36 Amber, 36 White)	
Legal Heading	W-1	
SAE	J595 Class 1	

M844280YWCL-DC

13" Scene Light / Warning Light

NEW RIGID LIGHT STRIPS & FLEXIBLE LIGHT STRIPS

4 NEW RIGID STRIP LIGHTS



Low Profile Rigid Linear White Interior Strip Lights

SPECIFICATIONS	M84450	M84451	M84452	M84453	
Dimensions	19.2 L x 0.9"W x 0.4"D	25.3 L x 0.9"W x 0.4"D	37.1 L x 0.9"W x 0.4"D	48.8 L x 0.9"W x 0.4"D	<ul style="list-style-type: none"> • Ultra Low Profile Design • Frosted Lens with Wide Beam Angle • ABS Body & Polycarbonate Lens • 2 Blunt Cut Wires, 6" Long • 5 Year Warranty
LEDs	48	72	101	144	
Lumens	650	900	1400	1800	
Voltage	12.8VDC	12.8VDC	12.8VDC	12.8VDC	
Amp Draw	0.9A	1.2A	1.7A	2.0	
Connector	2 Leads Blunt Cut, 6"	2 Leads Blunt Cut, 6"	2 Leads Blunt Cut, 6"	2 Leads Blunt Cut, 6"	
M84450		18" Rigid Strip, Low Profile			
M84451		24" Rigid Strip, Low Profile			
M84452		36" Rigid Strip, Low Profile			
M84453		48" Rigid Strip, Low Profile			



M84450



M84451



M84452



M84453

NEW MSLS-SERIES — SILICONE FLEXIBLE STRIP LIGHTS IN COLOR



Now our popular Silicone Flexible Strip Lights are available in Blue, Red, and Amber in both 24" and 36" lengths.

SPECIFICATIONS	MSLS-2436 SERIES	MSLS-3654 SERIES	
Dimensions	24 L x 0.4"W x 0.16"D (not including end cap)	36 L x 0.4"W x 0.16"D (not including end cap)	<ul style="list-style-type: none"> • Soft Silicone Jacket • Black PCB Board • Available in 24" & 36" • 3M Adhesive Tape Mount • 5 Year Warranty / 2 Year if applied to Exterior Surface
LEDs	36	54	
Voltage	12.8VDC	12.8VDC	
Amp Draw	0.6A (BL) 0.5A (R) 0.8A (Y)	0.9A (BL) 0.8A (R) 1.2A (Y)	
MSLS-2436BL		24" Flexible Strip, Blue	
MSLS-2436R		24" Flexible Strip, Red	
MSLS-2436Y		24" Flexible Strip, Amber	
MSLS-3654BL		36" Flexible Strip, Blue	
MSLS-3654R		36" Flexible Strip, Red	
MSLS-3654Y		36" Flexible Strip, Amber	



Blue – Off



Blue – ON



Red – Off



Red – ON



Amber – Off



Amber – ON



PANOR CORP / MAXXIMA

125 CABOT COURT, HAUPPAUGE, NY 11788 USA

TEL: 631.434.1200 1.866.MAXXIMA

FAX: 631.434.1457 INFO@MAXXIMA.COM

WWW.MAXXIMA.COM

DISTRIBUTED BY:

